

ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 4W 250LM 830

0026783



Range Features

- High lumen output: 260lm (4000K)
- 3000K Warm white, 4000K Cool White
- Instant start
- Clear or frosted finish
- Compatible with Lumiance Insaver & Microsaver (Recessed, Semi-Recessed & Surface mounted)
- Average rated life 15,000 hrs



PRODUCT OVERVIEW

Lamp finish	Frosted
Lamp shape	Micro-Lynx
Colour temperature (K)	3000
Colour	830 warm white
CRI (Ra)	80
Dimmable	No
EAN code	5410288267838
Energy class	A+
Cap/Base	GX53
Type	ToLEDo Micro-Lynx
Watt (Nominal) (W)	3.5
Light colour	830 warm white
Ordering number	0026783
Efficacy (Rated) (lm/w)	71.42
Average life (Rated) (h)	15000
Luminous flux (Rated) (lm)	250
Technology	LED
Voltage (V)	220-240
Colour consistency (SDCM)	6

DATA TABLE

General data

Average life (Nominal) (h)	15000
Control gear required	No
Lamp finish	Frosted

ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 4W 250LM 830

0026783

Lamp shape	Micro-Lynx
Control gear availability	No
Dimmable	No
Dry applications use only	Yes
EAN code	5410288267838
Energy class	A+
Energy saving lamp	Yes
Fixture rating	Open
General application	Hospitality; Residential & Consumer
Intended purpose	General lighting
Cap/Base	GX53
Lamp mercury content (mg)	0
Type	ToLEDo Micro-Lynx
No. of switching cycles before premature failure (min)	20000
Optimal operating condition (°C)	25
Ordering number	0026783
Range features	High lumen output: 260lm (4000K) 3000K Warm white, 4000K Cool White Instant start Clear or frosted finish Compatible with Lumiance Insaver & Microsaver (Recessed, Semi-Recessed & Surface mounted) Average rated life 15,000 hrs
Product name	ToLEDo MicroLynx Frosted 4W 250LM 830
Average life (Rated) (h)	15000
Special purpose lamp	No
Starting time (max) (s)	0.05
Technology	LED
Transformer required	No
Sales pack quantity	6
Warm-up time to 60% of full light (max) (s)	< 1s => 60%
E-number SE	8359424
E-number FI	4740047
Product features	The microlynx LED FROSTED W aims to replace a GX53 CFL lamp. This product with a 15,000 hours life is available in 3000 Kelvin color, and will deliver 250lm instantaneously. Perfect for kitchen or bathroom this product is 3 years warranty for a complete peace of mind.

Optical data

Chromaticity coordinate X	-1
Chromaticity coordinate Y	-1
Colour temperature (K)	3000
CRI (Ra)	80

ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 4W 250LM 830

0026783

Light colour	830 warm white
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Nominal) (lm)	250
Luminous flux (Rated) (lm)	250
Suitable for accent lighting	No
Adjustable chromaticity	No
Colour consistency (SDCM)	6


Physical data

Colour	830 warm white
Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Lamp Length (mm) - C/L	24.6
Single packaging type	Box/Sleeve
Weight (kg)	0.05
Inner package net weight (kg)	0.27
Inner package dimensions (L x W x H) (cm)	16.30 x 12.40 x 10.50
Outer package dimensions (L x W x H) (cm)	66.00 x 18.20 x 25.00
Single package dimensions (L x W x H) (cm)	7.80 x 3.80 x 7.80

Electrical data

Current (A)	30
Drive current (mA)	30
kWh per 1000 hours burning time	4
Lamp power factor	0.5
Watt (Nominal) (W)	3.5
Efficacy (Rated) (lm/w)	71.42
Watt (Rated) (W)	3.5
Voltage (V)	220-240

TECHNICAL DRAWINGS

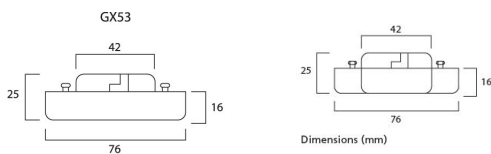

ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 4W 250LM 830

0026783

