


START eco Surface IP44

START eco Surface IP44 500lm 830
0043114



Productkenmerken

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 180mm. Power 6W, output 500 lumens. Supplied with LED driver (non-dimmable). IK03 PMMA diffuser. Low maintenance with 30,000 hours LED life expectancy



PRODUCTOVERZICHT

Artikelnummer	0043114
Productnaam	START eco Surface IP44 500lm 830
Technologie	LED
Housing	Aluminium
Montage	Surface mounted
Environment	Internal
Algemene toepassing	Residential & Consumer
Certificeringen	EUNEW009
ETIM Class	EC002892
E-nummer FI	4170562
Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	83
Kleurtemperatuur (K)	3000
Lichtkleur	Warm White
CRI (Ra)	80
Initiële kleurvariatie (SDCM)	6
Beam Angle (°)	120
Glare control	UGR 28
Fotobiologische Risicogroep	RG0
Totaal energieverbruik (W)	6
Electrical protection	Klasse 1
Type ballast	Integral
Dimmable	Nee
Gemiddelde levensduur (nominaal) (u)	30000
Kleur behuizing	Wit
IP waarde	IP44
IK waarde	IK03
EAN code	5410288431147
Lamps	No

GEGEVENSTABEL

Algemene gegevens

Artikelnummer	0043114
---------------	---------

START eco Surface IP44

START eco Surface IP44 500lm 830
0043114

Productnaam	START eco Surface IP44 500lm 830
Technologie	LED
Housing	Aluminium
Montage	Surface mounted
Environment	Internal
Algemene toepassing	Residential & Consumer
Operating temperature range (°C)	0 to +40°C
Certificeringen	EUNEW009
ETIM Class	EC002892
E-nummer FI	4170562

Optische gegevens

Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	83
Kleurtemperatuur (K)	3000
Lichtkleur	Warm White
CRI (Ra)	80
Initiële kleurvariatie (SDCM)	6
Beam Angle (°)	120
Distribution type	Direct
Glare control	UGR 28
Fotobiologische Risicogroep	RG0

Elektrische gegevens

Totaal energieverbruik (W)	6
Netspanning (V)	220-240V~
Lamp power factor	0.8
Electrical protection	Klasse 1
Type ballast	Integral
Dimmable	Nee
Drive current (mA)	110
Duur inschakelstroom (µs)	50
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50Hz
Max. Armaturen per 10A C automaat	17
Max. Armaturen per 16A C automaat	28

Gegevens levensduur

Gemiddelde nominale levensduur - L70 B50	30000
Gemiddelde nominale levensduur - L80 B50	18700
Gemiddelde levensduur (nominaal) (u)	30000

Fysieke gegevens

Kleur behuizing	Wit
IP waarde	IP44
IK waarde	IK03
Diffuser finish	Opaal
Diffuser material	Polycarbonaat

START eco Surface IP44

START eco Surface IP44 500lm 830
0043114

Lengte (mm)	180
Breedte (mm)	180
Nominal Product Height (mm)	75
Gewicht (kg)	0.209


Verpakkingen

Type enkelvoudige verpakking	Carton
EAN code	5410288431147
Enkele lengte verpakking (cm)	22.7
Enkele breedte verpakking (cm)	22.73
Hoogte eenheidsverpakking (cm)	8.03
DUN14 (outer)	15410288431144
Eenheden per omdoos	6
Packaging outer length / height (cm)	27.2
Packaging outer width (cm)	21.6
Packaging outer depth (cm)	44.2

Veiligheidsgegevens

Optimale bedrijfsomstandigheden (°C)	-20-40
--------------------------------------	--------

FOTOMETRISCHE GEGEVENS

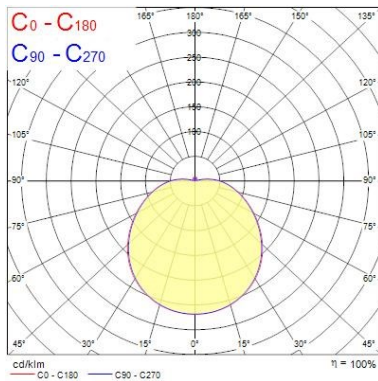


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.80 1.86	537	21	29
1.0	3.59 3.71	134	5	7
1.5	5.39 5.57	60	3	3
2.0	7.19 7.43	34	2	2
2.5	9.00 9.29	21	1	1
3.0	10.78 11.14	15	1	1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 123.4°)
— C90 - C270 (Half beam angle: 121.8°)


TECHNISCHE TEKENINGS




Version	Ø	H
6W	180	75
12W	250	80
17/18W	330	96
24W	360	100


START eco Surface IP44 *START eco Surface IP44 500lm 830* 0043114


SYLVANIA 0043114


 This luminaire contains built in LED lamps.

 } **L
E
D**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **L
E
D**

The lamps cannot be changed in the luminaire.

SYLVANIA 0043114  874/2012