

START eco Surface IP44

START eco Surface IP44 2000lm 830
0043117



Productkenmerken

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 360mm. Power 24W, output 2000 lumens. Supplied with LED driver (non-dimmable). IK03 PMMA diffuser. Low maintenance with 30,000 hours LED life expectancy



NOTES

undefined

PRODUCTOVERZICHT

Artikelnummer	0043117
Productnaam	START eco Surface IP44 2000lm 830
Technologie	LED
Housing	Aluminium
Montage	Surface mounted
Environment	Internal
Algemene toepassing	Residential & Consumer
Certificeringen	EUNEW009
ETIM Class	EC002892
E-nummer FI	4170565
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	83
Kleurtemperatuur (K)	3000
Lichtkleur	Warm White
CRI (Ra)	80
Initiële kleurvariatie (SDCM)	6
Beam Angle (°)	120
Glare control	UGR 28
Fotobiologische Risicogroep	RG0
Totaal energieverbruik (W)	24
Electrical protection	Klasse 1
Type ballast	Integral
Dimmable	Nee
Gemiddelde levensduur (nominaal) (u)	30000
Kleur behuizing	Wit
IP waarde	IP44
IK waarde	IK03
EAN code	5410288431178
Lamps	Nee

START eco Surface IP44

START eco Surface IP44 2000lm 830
0043117

GEGEVENSTABEL

Algemene gegevens

Artikelnummer	0043117
Productnaam	START eco Surface IP44 2000lm 830
Technologie	LED
Housing	Aluminium
Montage	Surface mounted
Environment	Internal
Algemene toepassing	Residential & Consumer
Operating temperature range (°C)	0 to +40°C
Certificeringen	EUNEW009
ETIM Class	EC002892
E-nummer FI	4170565

Optische gegevens

Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	83
Kleurtemperatuur (K)	3000
Lichtkleur	Warm White
CRI (Ra)	80
Initiële kleurvariatie (SDCM)	6
Beam Angle (°)	120
Distribution type	Direct
Glare control	UGR 28
Fotobiologische Risicogroep	RG0

Elektrische gegevens

Totaal energieverbruik (W)	24
Netspanning (V)	220-240V~
Lamp power factor	0.8
Electrical protection	Klasse 1
Type ballast	Integral
Dimmable	Nee
Drive current (mA)	216
Duur inschakelstroom (µs)	50
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50Hz
Max. Armaturen per 10A C automaat	9
Max. Armaturen per 16A C automaat	15

Gegevens levensduur

Gemiddelde nominale levensduur - L70 B50	30000
Gemiddelde nominale levensduur - L80 B50	18700
Gemiddelde levensduur (nominaal) (u)	30000

START eco Surface IP44

START eco Surface IP44 2000lm 830
0043117

Fysiske gegevens

Kleur behuizing	Wit
IP waarde	IP44
IK waarde	IK03
Diffuser finish	Opaal
Diffuser materiaal	Polycarbonaat
Lengte (mm)	360
Breedte (mm)	360
Nominal Product Height (mm)	100
Gewicht (kg)	0.887


Verpakkingen

Type enkelvoudige verpakking	Carton
EAN code	5410288431178
Enkele lengte verpakking (cm)	42.97
Enkele breedte verpakking (cm)	42.97
Hoogte eenheidsverpakking (cm)	10.97
DUN14 (outer)	15410288431175
Eenheden per omdoos	6
Packaging outer length / height (cm)	67.2
Packaging outer width (cm)	40.6
Packaging outer depth (cm)	42.2

Veiligheidsgegevens


Optimale bedrijfsomstandigheden (°C)	-20-40
--------------------------------------	--------

FOTOMETRISCHE GEGEVENS

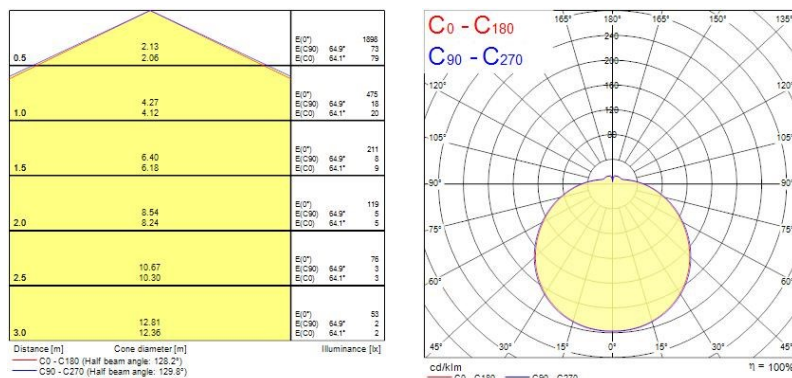


TECHNISCHE TEKENINGS


START eco Surface IP44 *START eco Surface IP44 2000lm 830* 0043117




Version	Ø	H
6W	180	75
12W	250	80
17/18W	330	96
24W	360	100

SYLVANIA 0043117

 This luminaire contains built in LED lamps.




The lamps cannot be changed in the luminaire.

874/2012 

START eco Surface IP44

START eco Surface IP44 2000lm 830

0043117

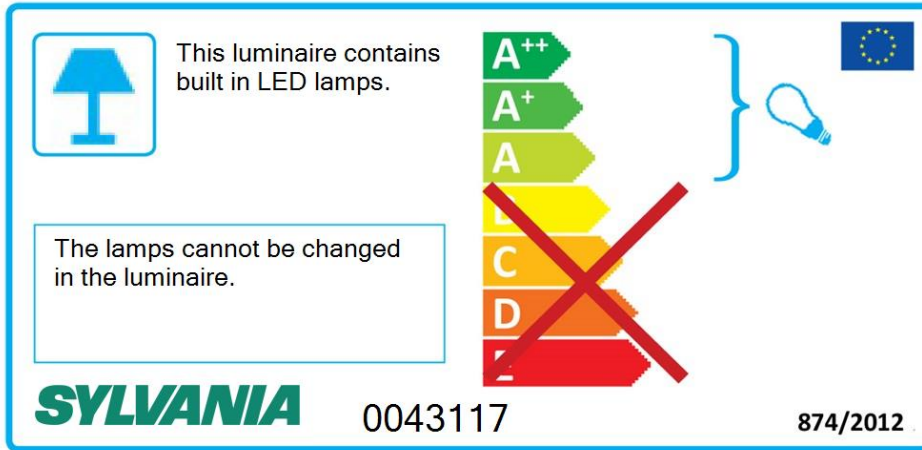

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0043117

874/2012

The label features a vertical energy efficiency scale from A++ (dark green) to F (red). A red 'X' is drawn over the scale from B to F. A blue bracket on the right side of the scale groups the A++ and A+ categories, with a small lightbulb icon next to it. The European Union flag is located in the top right corner of the label.