



CoreLine Recessed Spot RS140







	P(W)	 Ø mm	 kg
RS140B LED fixed	11	78	0.54
RS141B LED adjustable	11	80	0.56

Fixed

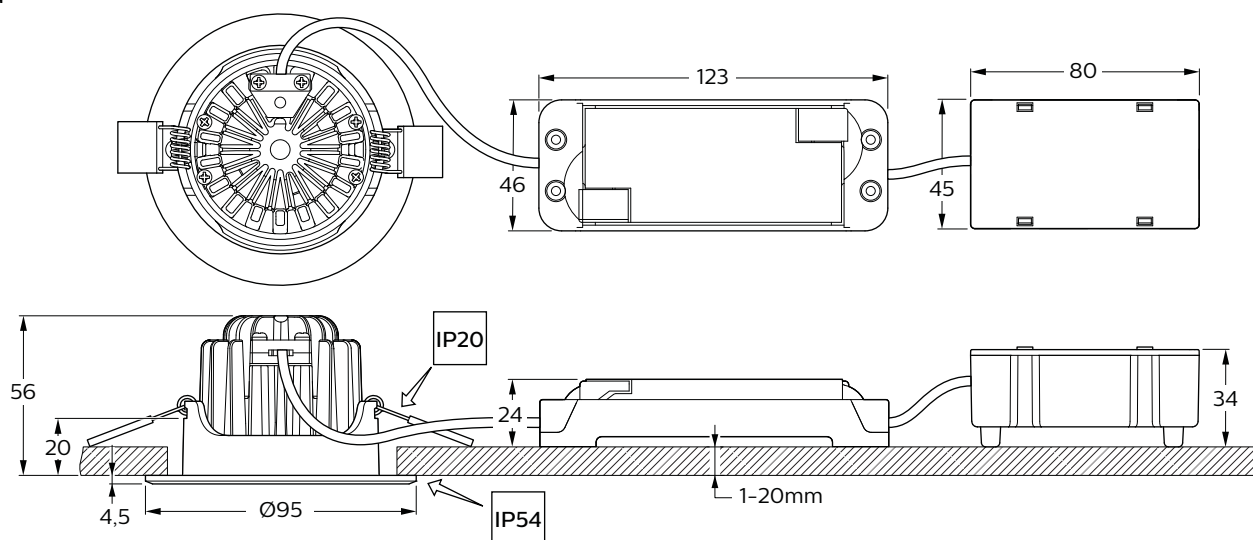


Adjustable

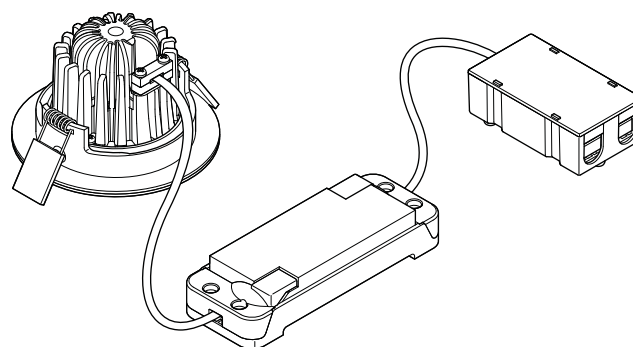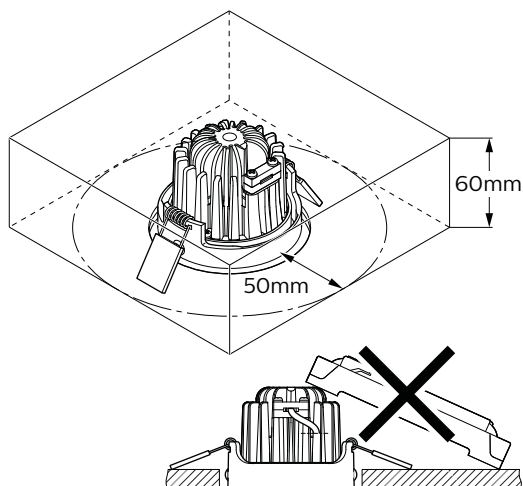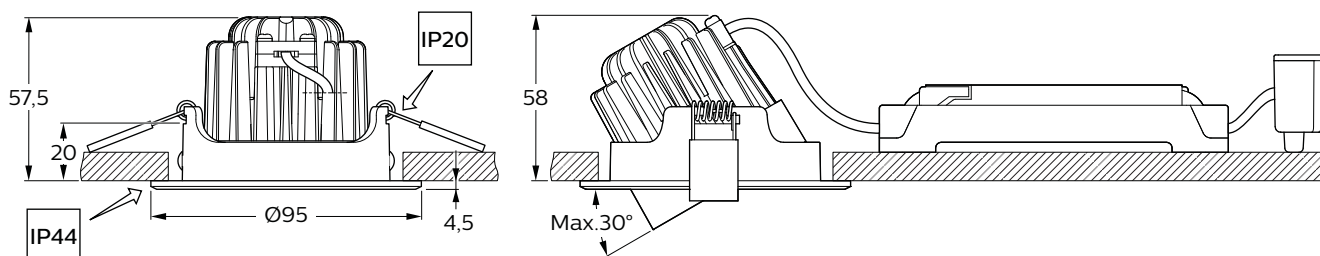


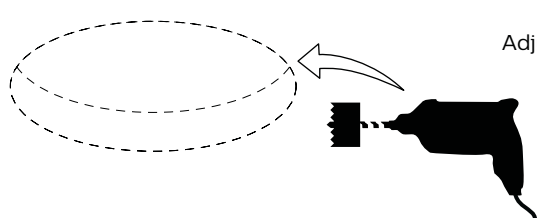


1a




1b

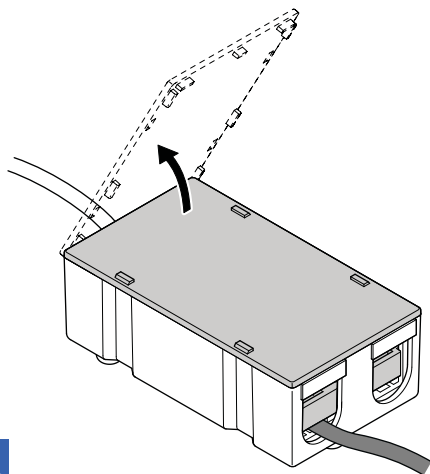


2a

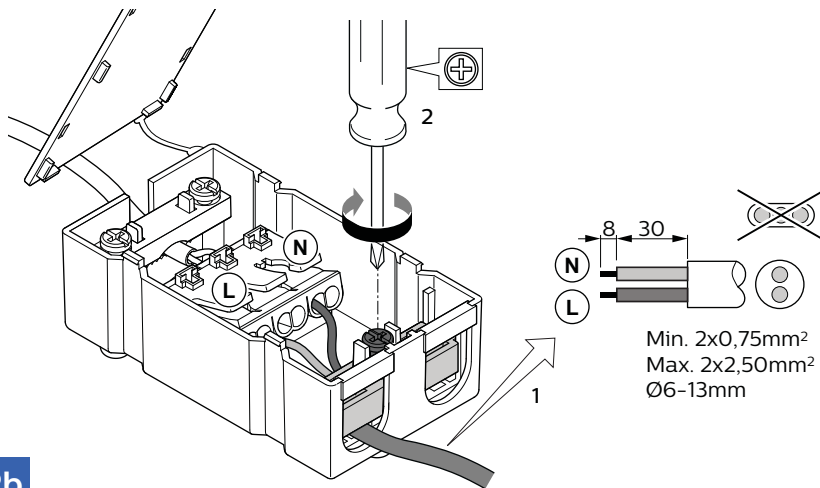

2b


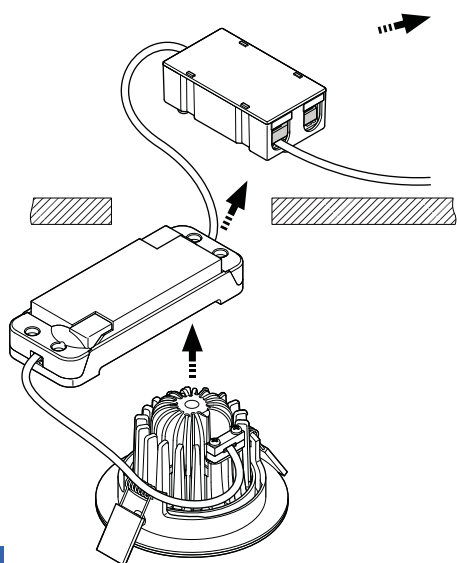


3a

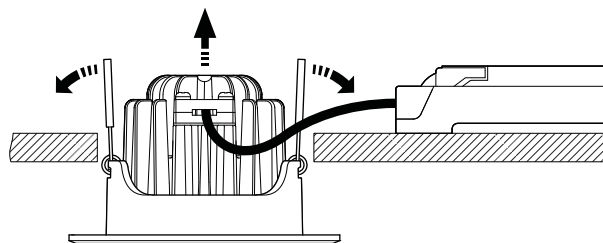

3b

! The luminaire shall, under no circumstances, be covered with insulating matting or similar material.

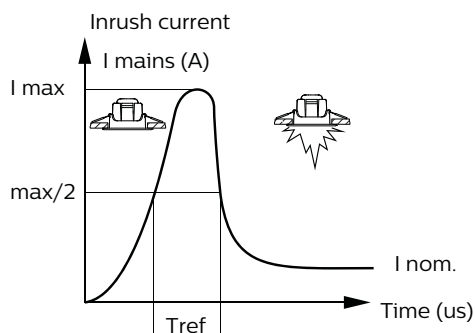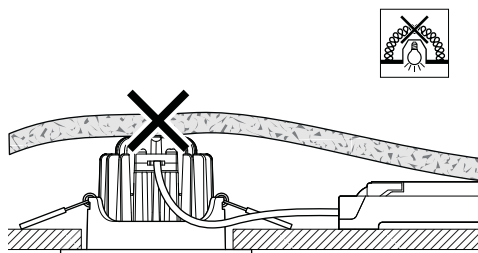

Electrical Characteristics

$I_{max}(A)$	7
$T_{ref}(\mu s)$	300
MCB	DownlightsMax.
B-10A	25
B-13A	32
B-16A	40
C-10A	40
C-13A	54
C-16A	68



- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- Only to be installed outside arms reach as recessed ceiling luminaire.
- For complete and updated list of advised dimmers, please check the CoreLine Recessed Spot RS140 page on the Philips Lighting eCatalog: <http://www.ecat.lighting.philips.com>